



- **Standard SIP phone**
- **Robust housing, constructed of stainless steel**
- **Vandal resistant handset and armored cord**
- **Wall mounting, simple installation**
- **Weather proof protection: up to IP65**
- **Programmable for auto-dial**
- **External power supply or PoE (SIP)**
- **RJ45 Port for SIP connection**
- **Inductive coupler fitted as standard for hard of hearing**
- **CE, FCC compliance**

The Handset Telephone is designed to meet the needs of client who experience loss through vandalism. Ideal for parking lots, prisons, railway/metro platforms, hospitals, police stations, ATM machines, stadiums, outside building etc.

Housed in stainless steel box and manufactured to a high standard, these telephones offer increased resistance to vandalism, and ensure that the primary function of communications is maintained at all times.

Extremely easy to install. The cable entrance is on the back of the phone to prevent from artificial damage, while the keypad is weather and vandal resistant.

#### SIP-VoIP TECHNICAL SPECIFICATIONS

##### Adapter Input:

100-240VAC 50~60Hz Output:5V/1A

##### Port:

WAN: 10/100Base- T RJ-45 for LAN, Auto MDIX

LAN: 10/100Base- T RJ-45 for PC, Auto MDIX

##### Power Consumption:

Idle:1.5W/ Active:1.8W

##### Main Chip:

Broadcom

##### Voice Features

- Support 2 lines SIP, SIP 2.0 (RFC3261)
- Codec: G.711A/u, G.7231 high/low, G.729, G.722,G.726
- Echo cancellation: Support G.168 and hand-free can support 96ms
- Supports full duplex.
- SIP support SIP domain,SIP authentication(none, basic,MD5),DNS name of server, peer to peer
- SIP support 2 servers, user can through each server to calling in and out

##### Network Features

- WAN/LAN: support Bridge mode
- Support PPPoE for xDSL
- support VLAN
- Support Stun penetration
- Support DHCP get IP on WAN port

## TECHNICAL SPECIFICATIONS

### Casing Material

Brushed stainless steel body  
Colors: RED, YELLOW, GREY

### Handset Material

ABS material handset with stainless steel spiral cord.

### Keypad optional

Hotline Phone without keypad

### Temperature

Operating: -30°C to +65°C  
Storing: -40°C to +75°C

### Weather Resistance

IP65

### Ringling Tone

Shrill warble tone 80 dBA @ 1 metre typical

### Hook switch

Electronic / magnetic with no visible moving parts

### M.T.B.F.

Calculated to have an M.T.B.F. in excess of 50,000 hours using

### Weight

Up to 3 kg depending on option

## PACKAGE

Unit size: 240 \*100 \*106 (mm)


Carton size: 340 \*235 \*165 (mm)

Packaging materials: pearl cotton, carton

Gross weight: 3.5KG

Net weight: 2.7KG

## DIMENSIONS

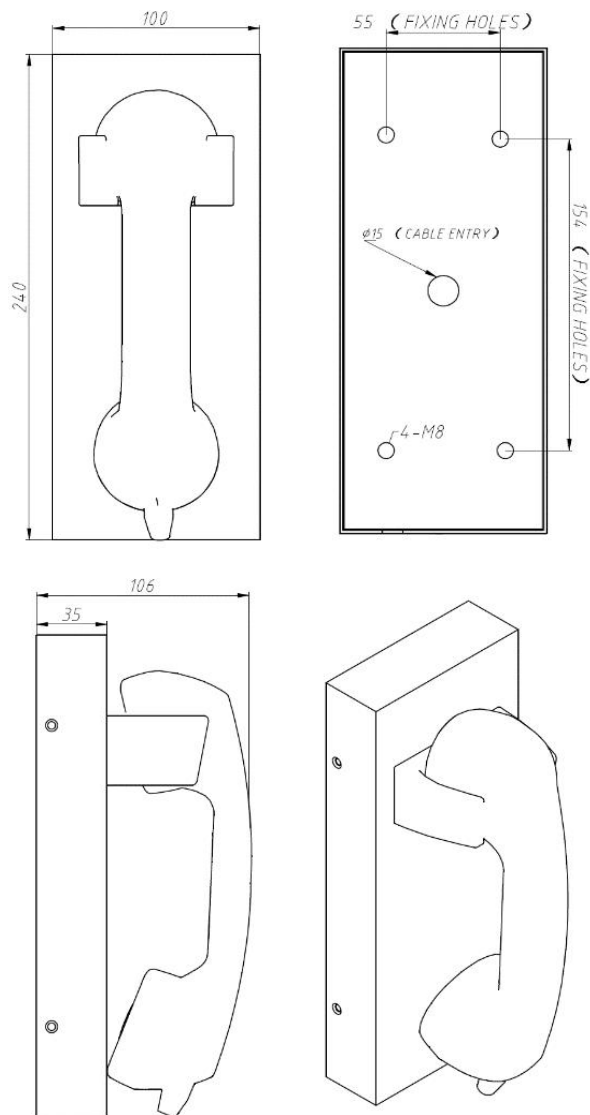

(Measured in mm)

## APPROVALS



This mark indicates compliance with the:  
Radio & Telecommunications Terminal Equipment  
Directive  
2004/108/EC



This mark indicates compliance with the:  
FCC Part 15 Subpart B Class B

